





**FRIGOTEC®**

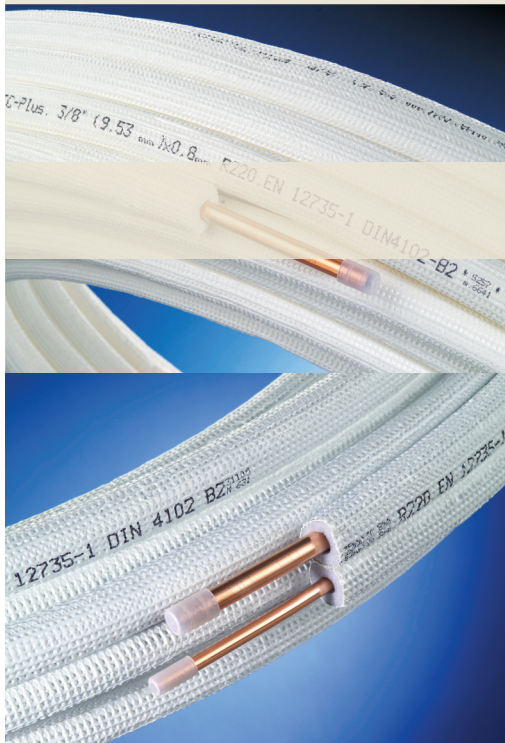

Copper tubes for refrigeration, air conditioning and medical applications (inch)

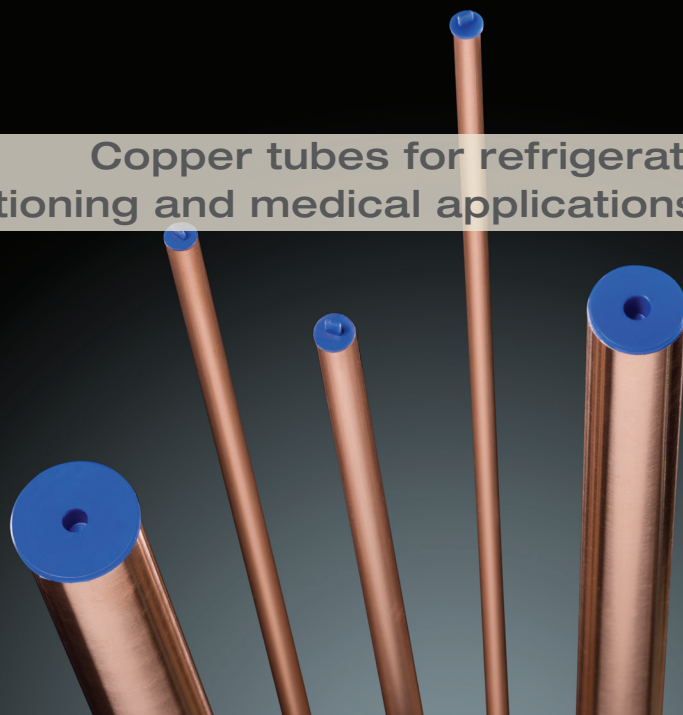

# FRIGOTEC®

## Copper tubes for refrigeration, air conditioning and medical applications


### Copper tubes in coils and straight lengths

The seamless drawn buntmetall-refrigeration tube is used mainly for gases in refrigeration equipment, refrigeration and air conditioning units as well as in heat exchangers and for medical gases. An outstanding property of this tube is its clean and dry inner surface and the closed ends, right after production.

The tubes do not exceed the restricted maximum total residual carbon on the inner tube surface according to EN 12735-1 / EN 13348 and they are also suitable for refrigerants R407C and R410A.

**FRIGOTEC®** - tubes meet the requirements for refrigeration/air conditioning tubes according to EN 12735-1 and for medical gases acc. EN 13348.

The ends are closed right after production to avoid contamination during storage and transport.

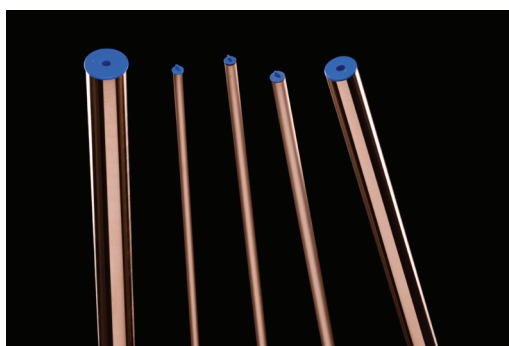

Material: Cu DHP  
Temper: R290 / R250  
Ends: closed  
Packaging: bundled  
Tolerances: EN 12735-1 / EN 13348  
Delivery conditions: EN 12735-1 / EN 13348  
Marking (sample): inch

### Straight lengths

### Coils

Cu DHP  
R220  
closed  
in cardboard boxes  
EN 12735-1  
EN 12735-1  
**FRIGOTEC®** - BMA  
1/4" x 0,03" x 50'  
6,35 mm x 0,76 mm x  
25 m EN 12735-1  
year/quarter

## The following tubes are available from stock:

### FRIGOTEC® - Straight lengths

Inch	Metric		kg/m	Length in meters
	AD	WT		
3/8 *	9,53	x 0,76	0,187	5
1/2	12,70	x 0,76	0,254	5
5/8	15,88	x 0,76	0,322	5
3/4	19,05	x 0,81	0,414	5
7/8	22,23	x 0,81	0,486	5
1	25,40	x 0,89	0,611	5
1 1/8	28,58	x 0,89	0,690	5
1 3/8	34,93	x 1,07	1,014	5
1 5/8	41,27	x 1,27	1,422	5
2 1/8	53,97	x 1,50	2,204	5
2 5/8 *	66,68	x 1,65	3,004	5
3 1/8 *	79,38	x 1,65	3,589	5
3 5/8 *	92,08	x 2,54	6,363	5
4 1/8 *	104,77	x 2,79	7,941	5

### FRIGOTEC® - Tubes in coils

Inch	Metric		kg/m	Coil length in meters
	AD	WT		
1/4 *	6,35	x 0,76	0,119	15,25
1/4 *	6,35	x 0,76	0,119	30,50
5/16 *	7,93	x 0,76	0,153	15,25
3/8 *	9,53	x 0,81	0,198	15,25
3/8 *	9,53	x 0,81	0,198	30,50
1/2 *	12,70	x 0,81	0,270	15,25
1/2 *	12,70	x 0,81	0,270	30,50
5/8 *	15,88	x 0,81	0,342	15,25
5/8 *	15,88	x 0,81	0,342	30,50
3/4 *	19,05	x 0,89	0,453	15,25
3/4 *	19,05	x 0,89	0,453	30,50
7/8 *	22,22	x 0,89	0,532	15,25

\* only EN 12735-1

**FRIGOTEC®** - metric-sizes see separate brochure.